



## BIFACIAL PERC MONOCRYSTALLINE • 144PMB10

# Half Cut

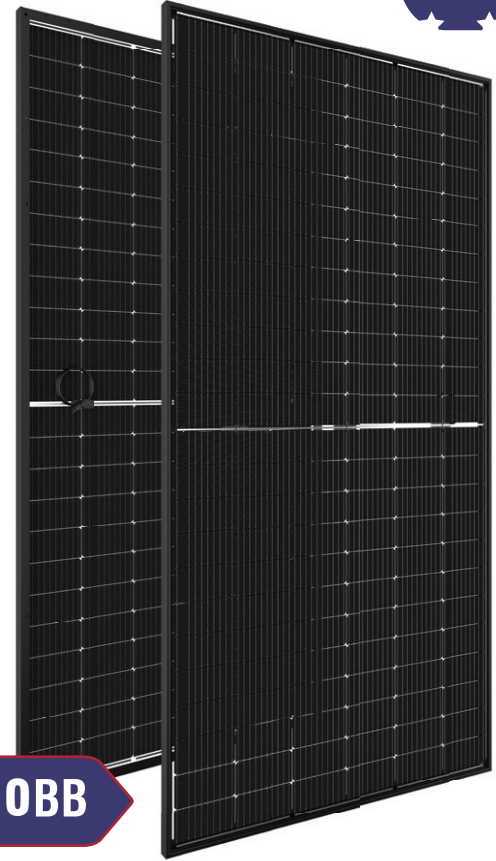

**BIFACIAL** **10BB**

-  **High Conversion Efficiency**  
High panel efficiency to guarantee high power output
-  **Self-Cleaning And Anti-Reflection Glass**  
Coating glass for self-cleaning reduces surface dust
-  **Outstanding Low Irradiation Glass**  
Outstanding panel performance even in weak light conditions
-  **Excellent Durability**  
Wind load up to 5400 Pa, Snow load up to 5400 Pa
-  **0~+5W Positive Power Tolerance**
-  **Easy Installation**

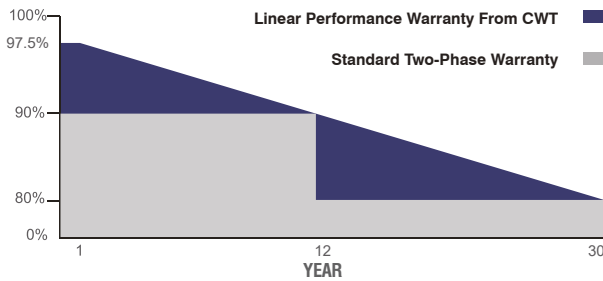

- CWT560-144PMB10 560 Wp
- CWT555-144PMB10 555 Wp
- CWT550-144PMB10 550 Wp
- CWT545-144PMB10 545 Wp
- CWT540-144PMB10 540 Wp
- CWT535-144PMB10 535 Wp
- CWT530-144PMB10 530 Wp

 30 Years Performance Warranty  12 Years Product Warranty



ISO 9001:2015, ISO 14001:2015, ISO 45001:2018


## ELECTRICAL CHARACTERISTICS

Model Type	CWT530 144PMB10	CWT535 144PMB10	CWT540 144PMB10	CWT545 144PMB10	CWT550 144PMB10	CWT555 144PMB10	CWT560 144PMB10
Peak Power (P <sub>max</sub> )	530Wp	535Wp	540Wp	545Wp	550Wp	555Wp	560Wp
Module Efficiency (%)	20.52	20.71	20.90	21.10	21.29	21.48	21.67
Maximum Power Voltage (V <sub>mp</sub> )	41.02	41.11	41.21	41.30	41.41	41.41	41.43
Maximum Power Current (I <sub>mp</sub> )	12.93	13.03	13.11	13.21	13.29	13.41	13.52
Open Circuit Voltage (V <sub>oc</sub> )	49.43	49.51	49.68	49.76	49.82	49.88	49.91
Short Circuit Current (I <sub>sc</sub> )	13.70	13.82	13.94	13.99	14.06	14.12	14.12
Power Tolerance	0~+5W						
Maximum System Voltage	1500V DC						
Operating Temperature	-40 ~ +85°C						
Protection Class	Class II						
Maximum Series Fuse Rating	25A						

## MECHANICAL SPECIFICATIONS

Cell Dimensions(mm/inch)	182x91 / 7.16x3.58
Cells per Module(pcs)	144 (6x24)
Weight(kg/lbs)	28 / 61.73
Panel Dimensions(mm/inch)	2278x1134x35 / 89.69x44.65x1.38
Max. Wind/Snow Load(Pa)/(lb/ft <sup>2</sup> )	(5400 / 5400) / (112.5 / 212)
Junction Box	IP68
Junction Box Cable Length(mm/inch)	350-1600 / 13.78-63.00
Frame Color	Silver / Black
Rear Side Material	Transparent Backsheet

## PHYSICAL CHARACTERISTICS

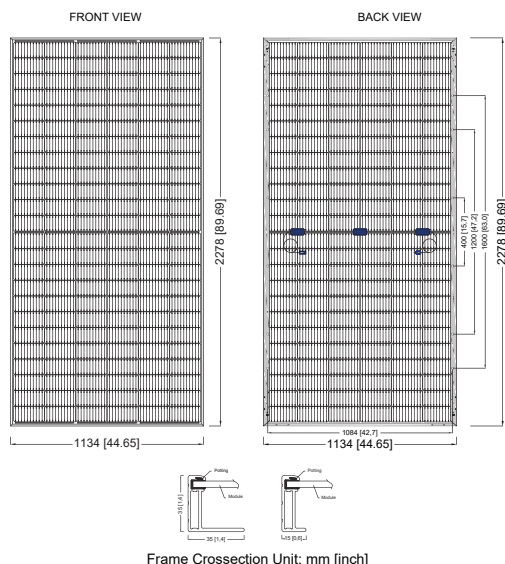

## REAR SIDE POWER GAIN

(550W Front Power Referenced)

Rear Side Power Gain	10%	20%	30%
Peak Power (P <sub>max</sub> )	605.0	660.0	715.0


## TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (I <sub>sc</sub> )	0.040%/°C
Temp. Coeff. of (V <sub>oc</sub> )	-0.270%/°C
Temp. Coeff. of (P <sub>max</sub> )	-0.350%/°C

## PACKING CONFIGURATION

Container	40' HQ
Pieces per Pallet	31
Pieces Per Container	620
Pallet Per Container	20

## ELECTRICAL CHARACTERISTICS

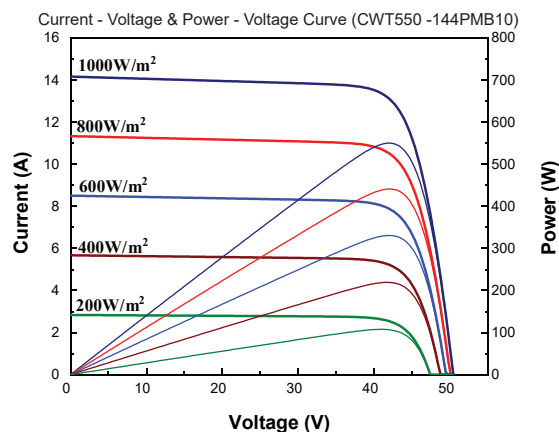

\* The specifications are obtained under the standard test conditions: 1000W/m<sup>2</sup> solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 3%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

\* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

\* CW Enerji reserves the right to change the specification of products without prior notice.