

WATER PROOF, SUITABLE FOR ROOFTOP
SOLAR PANEL FRAME SYSTEM

TOPCON MONOCRYSTALLINE • 108TNCK10

Half Cut

SOLAR ROOF TILE



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability


Wind load up to 2400 Pa, Snow load up to 5400 Pa




0~+5W Positive Power Tolerance



Easy Installation

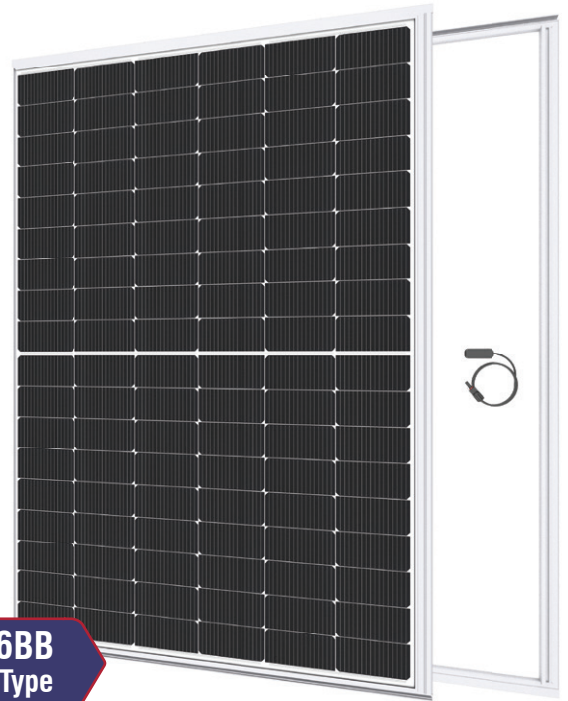

16BB
n-Type

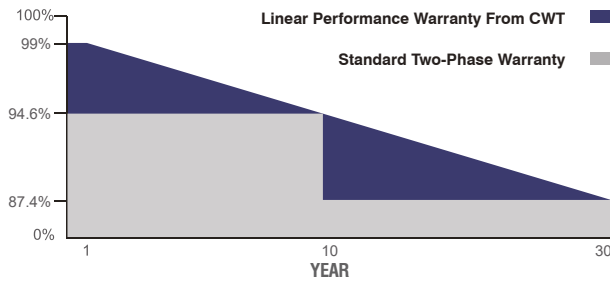

CWT450-108TNCK10 450 Wp

CWT445-108TNCK10 445 Wp

CWT440-108TNCK10 440 Wp

CWT435-108TNCK10 435 Wp



30 Years Performance Warranty



10 Years Product Warranty



ISO 9001:2015, ISO 14001:2015, ISO 45001:2018

SOLAR ROOF TILE

TOPCON MONOCRYSTALLINE ● 108TNCK10

Half Cut

ELECTRICAL CHARACTERISTICS

Model Type	CWT435 108TNCK10	CWT440 108TNCK10	CWT445 108TNCK10	CWT450 108TNCK10
Peak Power (P_{max})	435 Wp	440 Wp	445 Wp	450 Wp
Module Efficiency (%)	22.28	22.53	22.79	23.04
Maximum Power Voltage (V_{mp})	32.54	32.74	32.94	33.14
Maximum Power Current (I_{mp})	13.37	13.44	13.51	13.58
Open Circuit Voltage (V_{oc})	38.51	38.71	38.91	39.11
Short Circuit Current (I_{sc})	14.17	14.24	14.31	14.38
Power Tolerance	0~+5W			
Maximum System Voltage	1500V DC			
Operating Temperature	-40 ~ +85°C			
Protection Class	Class II			
Maximum Series Fuse Rating	25A			


MECHANICAL SPECIFICATIONS

Cell Dimensions(mm/inch)	182 x 91 / 7.16x 3.58
Cells per Module(pcs)	108 (6x18)
Weight(kg/lbs)	23.2 / 51.15
Panel Dimensions(mm/inch)	1762x1165.1 / 69.37x45.87
Max. Wind/Snow Load(Pa)/(lb/ft ²)	(2400 / 5400) / (50 / 212)
Junction Box	IP68
Junction Box Cable Length(mm/inch)	350-1600 / 13.78-63.00
Frame Color	Silver / Black
Purlins Spacing(mm/inch)	1122 / 44.17


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (I_{sc})	0.040%/°C
Temp. Coeff. of (V_{oc})	-0.260%/°C
Temp. Coeff. of (P_{max})	-0.30%/°C

PHYSICAL CHARACTERISTICS

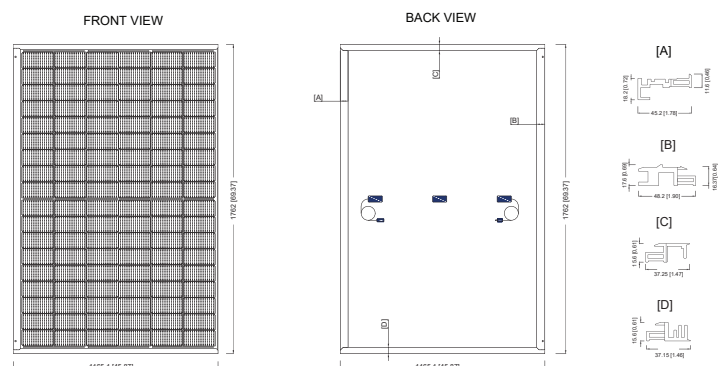

ELECTRICAL CHARACTERISTICS

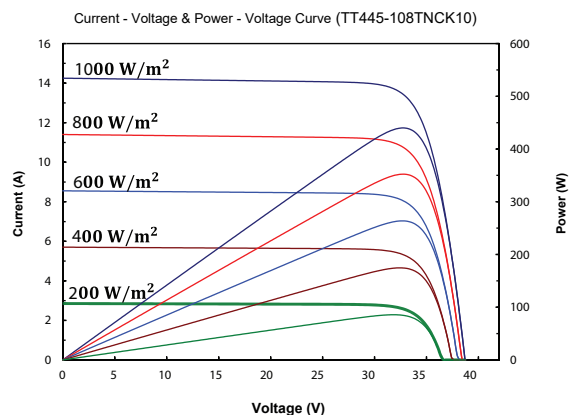

* The specifications are obtained under the standard test conditions: 1000W/m² solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 3%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

* CW Enerji reserves the right to change the specification of products without prior notice.