

BIFACIAL PERC MONOCRYSTALLINE 108PMB12

- ◆ TT550-108PMB12 550 Wp
- ◆ TT545-108PMB12 545 Wp
- ◆ TT540-108PMB12 540Wp
- ◆ TT535-108PMB12 535 Wp
- ◆ TT530-108PMB12 530 Wp



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability

Wind load up to 2400 Pa, Snow load up to 5400 Pa




0~+5W Positive Power Tolerance




Easy Installation



Double Sided Power Generation

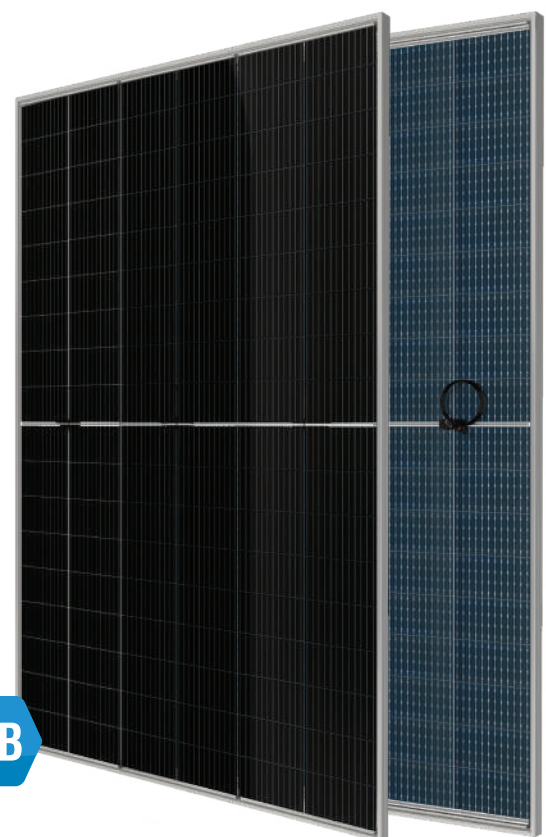

12BB

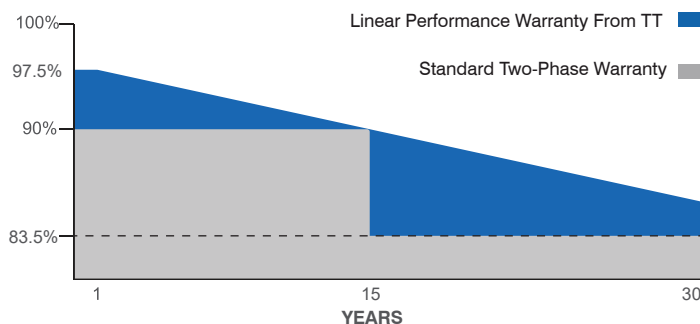

30 Years Performance Warranty



15 Years Product Warranty

Half-Cut

DOUBLE GLASS



IEC 61215, IEC 61730-1, IEC 61730-2
IEC 62804 PID (POTENTIAL INDUCED DEGRADATION)
IEC 61701 SALT MIST CORROSION
IEC 62716 AMMONIA CORROSION
ISO 9001:2015, ISO 14001:2015, ISO 45001:2018



SOMPO

www.tommatech.de