

# BIFACIAL PERC MONOCRYSTALLINE 108PMB10



- ◆ TT410-108PMB10 410 Wp
- ◆ TT400-108PMB10 400 Wp
- ◆ TT405-108PMB10 405 Wp
- ◆ TT395-108PMB10 395 Wp



## High Conversion Efficiency

High panel efficiency to guarantee high power output



## Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



## Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



## Excellent Durability

Wind load up to 2400 Pa, Snow load up to 5400 Pa





## 0~+5W Positive Power Tolerance



## Easy Installation



## Double Sided Power Generation

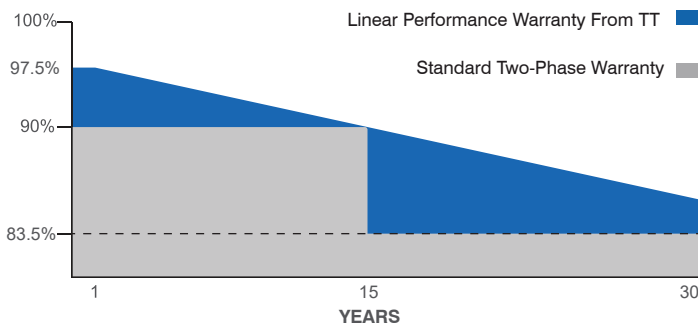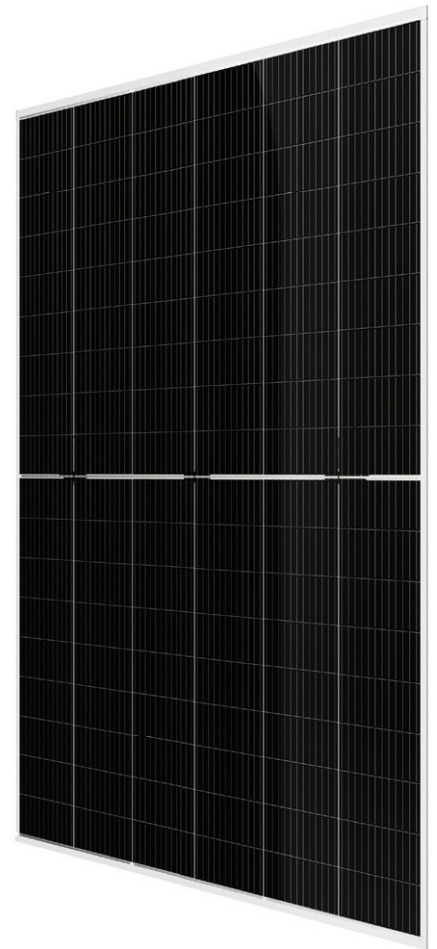

30 Years Performance Warranty



15 Years Product Warranty

# Half-Cut

DOUBLE GLASS



IEC 61215, IEC 61730-1, IEC 61730-2  
IEC 62804 PID (POTENTIAL INDUCED DEGRADATION)  
IEC 61701 SALT MIST CORROSION  
IEC 62716 AMMONIA CORROSION  
ISO 9001:2015, ISO 14001:2015, ISO 45001:2018




SOMPO

Model Type	TT395 108PMB10	TT400 108PMB10	TT405 108PMB10	TT410 108PMB10
Peak Power (P <sub>max</sub> )	395 Wp	400 Wp	405 Wp	410 Wp
Module Efficiency	20.23	20.48	20.74	21.00
Maximum Power Voltage (V <sub>mp</sub> )	30.90	31.10	31.30	31.50
Maximum Power Current (I <sub>mp</sub> )	12.79	12.86	12.94	13.02
Open Circuit Voltage (V <sub>oc</sub> )	36.90	37.10	37.40	37.60
Short Circuit Current (I <sub>sc</sub> )	13.62	13.70	13.77	13.85
Power Tolerance	0~+5W			
Maximum System Voltage	1500V DC			
Operating Temperature	-40 ~ +85°C			
Protection Class	Class II			
Maximum Series Fuse Rating	25A			

## MECHANICAL SPECIFICATIONS

Cell Dimensions(mm)	182 x 91
Cells per Module(pcs)	108 (6x18)
Weight(kg)	25.5
Panel Dimensions(mm)	1722x1134x30
Max. Wind/Snow Load(Pa)	2400/5400
Junction Box	IP68
Junction Box Cable Length(mm)	300-1200
Glass Thickness (mm)	2.0 / 2.0

## PHYSICAL CHARACTERISTICS

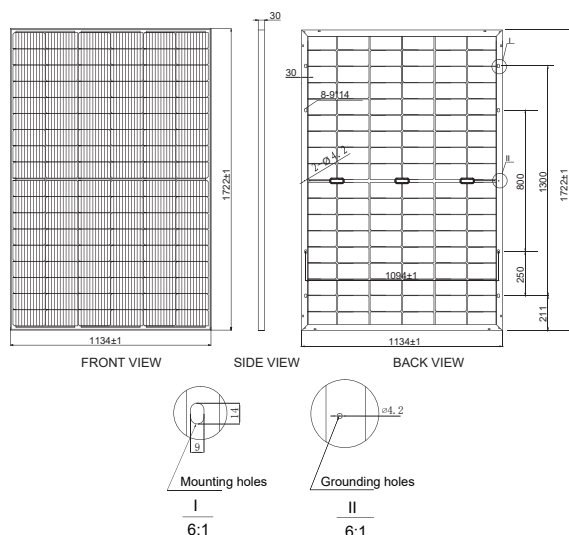

## REARSIDE POWER GAIN

(405W Front Power Referenced)

Rear Power Gain	5%	10%	15%	20%	25%
Maximum Power (P <sub>max</sub> )	425.25	445.50	465.75	486.00	506.25
Short Circuit Current (I <sub>sc</sub> )	14.46	15.15	15.84	16.52	17.21
Open Circuit Voltage (V <sub>oc</sub> )	39.27	41.14	43.01	44.88	46.75
Maximum Power Current (I <sub>mp</sub> )	13.59	14.23	14.88	15.53	16.17
Maximum Power Voltage (V <sub>mp</sub> )	32.87	34.43	35.99	37.56	39.13


## TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (I <sub>sc</sub> )	0.050%/°C
Temp. Coeff. of (V <sub>oc</sub> )	-0.270%/°C
Temp. Coeff. of (P <sub>max</sub> )	-0.350%/°C

## PACKING CONFIGURATION

Container	40' GP
Pieces per Pallet	35
Pieces per Container	910
Pallet Per Container	26

## ELECTRICAL CHARACTERISTICS

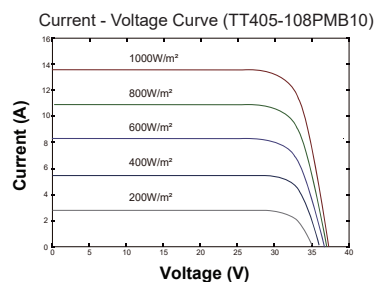

\* The specifications are obtained under the standard test conditions: 1000W/m<sup>2</sup> solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

\* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

\* TommaTech® GmbH reserves the right to change the specification of products without prior notice.

Ver.2308.23