


PERC MONOCRYSTALLINE • 108PMFB12



CW ENERJİ

108 cell

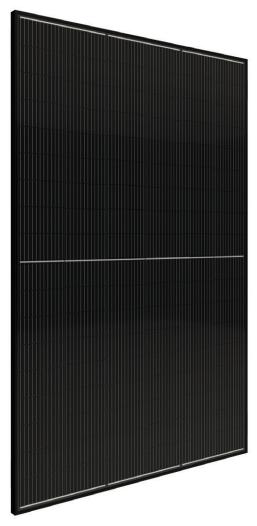

HalfZCut **Multi-BB BLACK SERIES**





High Conversion Efficieny

High panel efficiency to guarantee high power output.



Self-Cleaning and Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust.




Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions.



Easy Installation

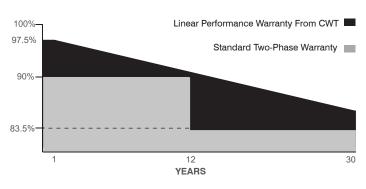



30 Years Performance Warranty



12 Years Product Warranty
















108PMFB12

Peak Power (Pmax) Module Efficiency Maximum Power Voltage (Vmp) Maximum Power Current (Imp) Open Circuit Voltage (Voc) Short Circuit Current (Isc) Power Tolerance Maximum System Voltage Operating Temperature Protection Class Maximum Series Fuse Rating

MECHANICAL SPECIFICATION

Cell Dimensions (mm) Cells per Module (pcs) Weight (kg) **Panel Dimensions (mm)** Max. Wind/Snow Load (Pa) **Junction Box Junction Box Cable Length (mm)**

CWT530 108PMFB12	CWT535 108PMFB12	CWT540 108PMFB12	CWT545 108PMFB12	CWT550 108PMFB12
530 Wp	535 Wp	540 Wp	545 Wp	550 Wp
20.70	20.90	21.09	21.29	21.48
30.7	30.9	31.1	31.3	31.5
17.27	17.31	17.36	17.42	17.46
37.0	37.2	37.5	37.7	37.9
18.28	18.33	18.38	18.45	18.49
		0~+5W		
		1500V DC		
		-40 ~ +85°C		
		Class II		
		30A		
		210x105		
		108 (6x18)		
		28.5		
		1965x1303x35		
		2400/5400		
		IP68		
		350-1600		

TEMPERATURE CHARACTERISTICS


Temp. Coeff. of (Isc)	0.05%/°C
Temp. Coeff. of (Voc)	-0.27%/°C
Temp. Coeff. of (Pmax)	-0.35%/°C

PACKING CONFIGURATION


Container 40' GP

Pieces per Pallet	30
Pieces per Container	480
Pallets per Container	16

PHYSICAL CHARACTERISTICS



ELECTRICAL CHARACTERISTICS



The specifications are obtained under the standard test conditions: 1000W/m2 solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 3%. The actual transactions will be subject

^{*} CW Enerji reserves the right to change the specification of products without prior notice.



to the contracts. These parameters are for reference only and it is not a part of the contracts. The chical specifications in this document may vary. For more information, refer to the "Installation Manual".

*For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

Please note that the color of PERC monocrystalline cells might vary slightly due to their natural structure. Consequently, there might be a color difference between the cells and between the cells and the backsheet