TOMMATECH GmbH
GERMAN-based company
CLOUD

TommaTech Power Series HeatPump

Application Quick Setup Guide

---

1. Download the app

Download the **TommaTech Cloud** app from the **Google Play Store** or **App Store**. Alternatively, you can download it by clicking the download buttons below.
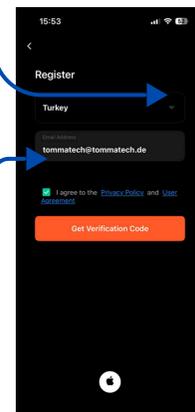
Download on the App Store
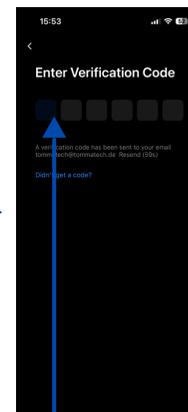
GET IT ON Google Play

TOMMATECH GmbH GERMAN-based company CLOUD

Press Buttons

---

2. Account Registration

Select Country

Register
Turkey
tommatech@tommatech.de
I agree to the Privacy Policy and User Agreement
Get Verification Code

Enter Verification Code
A verification code has been sent to your email tommatech@tommatech.de Resend (59s)
Didn't get a code?

Enter your email address

Enter the Verification Code

---

3. WiFi Connection (Step 1)

By default, it can connect within 10 seconds after the power is first turned on, and must be connected by pressing the buttons 10 seconds later.

Wifi set
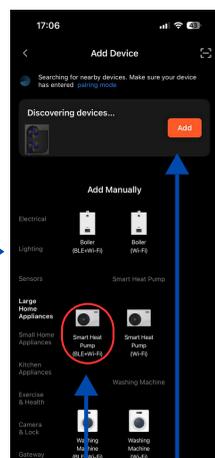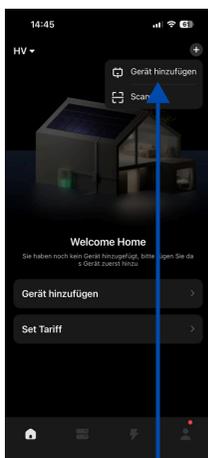SMART MODE   AP MODE
Add Device

1. Method

Access the Wi-Fi interface on the heat pump control panel, select Smart Mode, and your device will enter pairing mode.

Method 2

Select AP mode in the Control Panel, turn on your mobile phone's WiFi function and connect to the WiFi hotspot. (123456789)
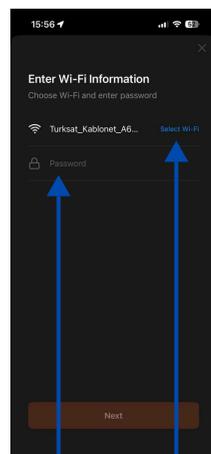
---

4. WiFi Connection (Step 2)

Click 'Add'

Click on the + in the right-hand corner, then click on Add device.

Click Add or select the Smart Heat Pump from the list

---

5. WiFi Connection (Step 3)

Enter Wi-Fi Information
Choose Wi-Fi and enter password
Turksat_Kablonet_A6...   Select Wi-Fi
Password
Next

Energy Household
TT HeatPump
Frequency Mode Smart
Operating Mode Heating

Enter your Wi-Fi password

Select Your Wi-Fi Network

If your device has been successfully added, you can access it from the **Household** section.
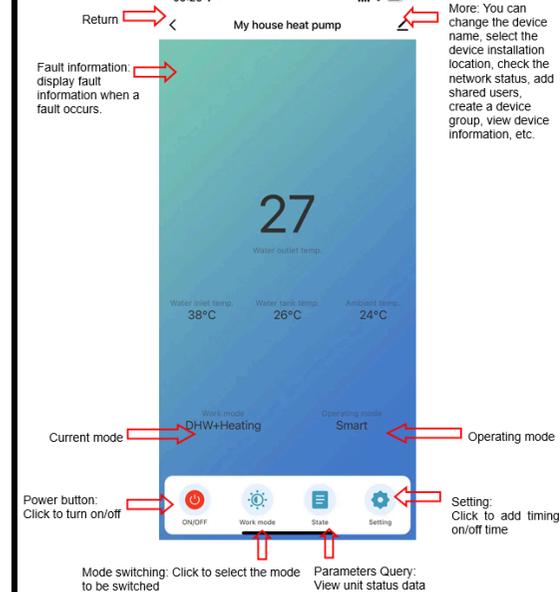
---

6. Application Interface

You can dynamically view the heat pump's power data from the homepage.

When you click on the heat pump icon, you can see the heat pump's instantaneous power data graph.

---

7. Device Interface

My house heat pump

Return

More: You can change the device name, select the device installation location, check the network status, add shared users, create a device group, view device information, etc.

Fault information: display fault information when a fault occurs.

27
Water outlet temp.

Water inlet temp. 38°C
Water tank temp. 26°C
Ambient temp. 24°C

Current mode   DHW+Heating
Operating mode   Smart

Power button: Click to turn on/off

ON/OFF   Work mode   State   Setting

Setting: Click to add timing on/off time

Mode switching: Click to select the mode to be switched

Parameters Query: View unit status data