

# Half Cut

## BIFACIAL PERC MONOCRYSTALLINE • 108PMB10




### High Conversion Efficiency

High panel efficiency to guarantee high power output



### Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



### Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



### Excellent Durability

Wind load up to 2400 Pa, Snow load up to 5400 Pa




### 0~+5W Positive Power Tolerance




### Easy Installation



### Twice EVA Laminated Double Glass

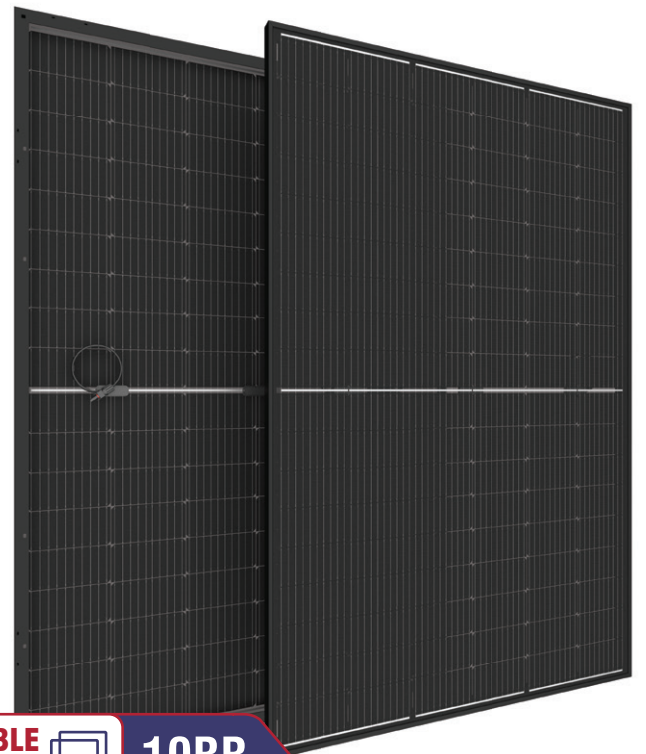

**DOUBLE GLASS**  **10BB**

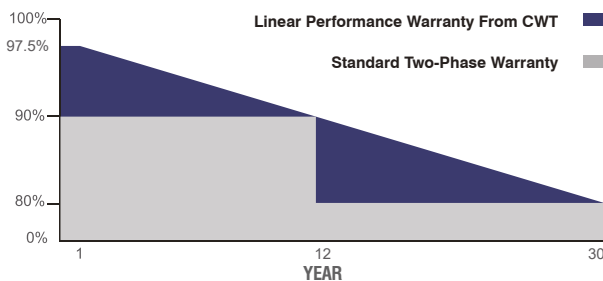

 30 Years Performance Warranty  12 Years Product Warranty

CWT410-108PMB10 410 Wp  
 CWT405-108PMB10 405 Wp  
 CWT400-108PMB10 400 Wp  
 CWT395-108PMB10 395 Wp  
 CWT390-108PMB10 390 Wp  
 CWT385-108PMB10 385 Wp  
 CWT380-108PMB10 380 Wp



ISO 9001:2015, ISO 14001:2015, ISO 45001:2018


ELECTRICAL CHARACTERISTICS

Model Type	CWT380 108PMB10	CWT385 108PMB10	CWT390 108PMB10	CWT395 108PMB10	CWT400 108PMB10	CWT405 108PMB10	CWT410 108PMB10
Peak Power (P <sub>max</sub> )	380 Wp	385 Wp	390 Wp	395 Wp	400 Wp	405 Wp	410 Wp
Module Efficiency (%)	19.46	19.72	19.97	20.23	20.48	20.74	21.00
Maximum Power Voltage (V <sub>mp</sub> )	30.72	30.76	30.88	31.04	31.13	31.25	31.39
Maximum Power Current (I <sub>mp</sub> )	12.44	12.53	12.64	12.73	12.85	12.96	13.07
Open Circuit Voltage (V <sub>oc</sub> )	35.55	36.64	36.72	36.83	36.94	37.03	37.09
Short Circuit Current (I <sub>sc</sub> )	13.35	13.47	13.59	13.71	13.82	13.92	14.07
Power Tolerance	0~+5W						
Maximum System Voltage	1500V DC						
Operating Temperature	-40 ~ +85°C						
Protection Class	Class II						
Maximum Series Fuse Rating	25A						

MECHANICAL SPECIFICATIONS

Cell Dimensions(mm/inch)	182x91 / 7.16x3.58
Cells per Module(pcs)	108 (18x6)
Weight(kg/lbs)	24.0 / 52.91
Panel Dimensions(mm/inch)	1722x1134x30 / 67.80x44.65x1.18
Max. Wind/Snow Load(Pa)/(lb/ft <sup>2</sup> )	(2400 / 5400) / (50 / 212)
Junction Box	IP68
Junction Box Cable Length(mm/inch)	350-1600 / 13.78-63.00
Glass Thickness(mm/inch)	2.0x2.0 / 0.08x0.08
Frame Color	Silver / Black

PHYSICAL CHARACTERISTICS

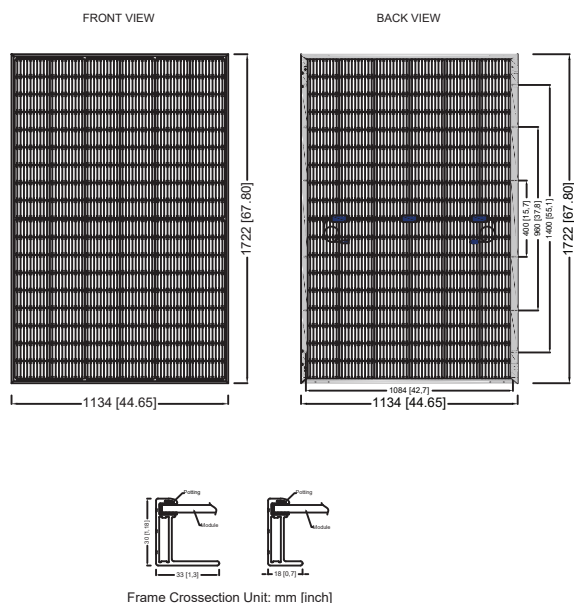

REAR SIDE POWER GAIN

(400W Front Power Referenced)

Rear Side Power Gain	10%	20%	30%
Peak Power (P <sub>max</sub> )	440.0	480.0	520.0


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (I <sub>sc</sub> )	0.040%/°C
Temp. Coeff. of (V <sub>oc</sub> )	-0.270%/°C
Temp. Coeff. of (P <sub>max</sub> )	-0.350%/°C

PACKING CONFIGURATION

Container	40' HQ
Pieces per Pallet	35
Pieces Per Container	910
Pallet Per Container	26

ELECTRICAL CHARACTERISTICS

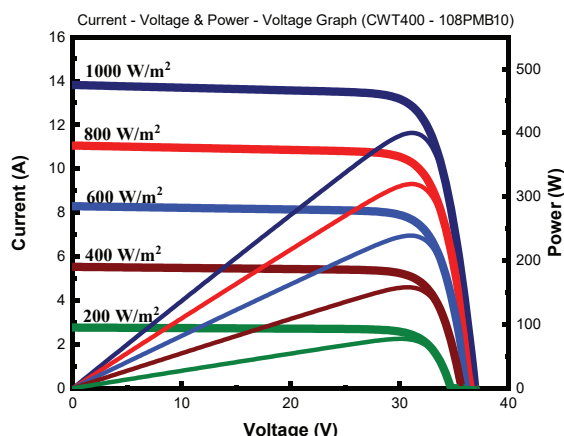

\* The specifications are obtained under the standard test conditions: 1000W/m<sup>2</sup> solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 3%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The technical specifications in this document may vary. For more information, refer to the "Installation Manual".

\* For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic, PVC or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.

\* CW Enerji reserves the right to change the specification of products without prior notice.